
SSLL10 - Gantry with side connections


Abstract:

Static test in linear elasticity, being used to validate the beam elements right `POU_D_T` for a specific loading and a distributed loading (key word `FORCE_POUTRE`).
One tests the relations and bending moments.

1 Problem of reference

1.1 Geometry

plane Problem

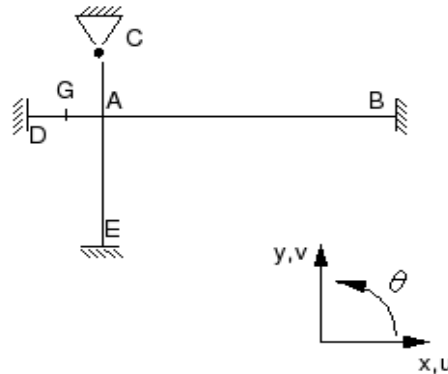

Beam	Length	Main moment of inertia
AB	$l_{AB} = 4\text{m}$	$I_{AB} = \frac{64}{3} 10^{-8} m^4$
AC	$l_{AC} = 1\text{m}$	$I_{AC} = \frac{1}{12} 10^{-8} m^4$
AD	$l_{AD} = 1\text{m}$	$I_{AD} = \frac{1}{12} 10^{-8} m^4$
AE	$l_{AE} = 2\text{m}$	$I_{AE} = \frac{4}{3} 10^{-8} m^4$

G is in the middle of DA .

Another characteristic of the beams not being used for computations: the beams are of square section.

$$A_{AB} = 16 \cdot 10^{-4} m$$

$$A_{AD} = 1 \cdot 10^{-4} m$$

$$A_{AC} = 1 \cdot 10^{-4} m$$


$$A_{AE} = 4 \cdot 10^{-4} m$$

1.2 Material properties

isotropic linear elastic Material: $E = 2 \cdot 10^{11} Pa$

1.3 Boundary conditions and loadings

- 1) Point: C articulated ($u_C = v_C = 0$).



Specific force in G : $F = -10^5 N$

Distributed force on beam: AD $p = -10^3 N/m$

2 Reference solution

2.1 Method of calculating used for the reference solution

One poses:

$$k_{An} = \frac{EI_{An}}{l_{An}}$$

with $n=B, C, D$ or E

$$K = k_{AB} + k_{AD} + k_{AE} + \frac{3}{4}k_{AC}$$

$$r_{An} = \frac{k_{An}}{K}$$

with $n=B, C, D$ or E

$$C_1 = + \frac{Fl_{AD}}{8} - \frac{pl_{AB}^2}{12}$$

- Rotation in A :

$$\theta = \frac{C_1}{4K}$$

- Moment in A :

$$M_{AB} = + \frac{pl_{AB}^2}{12} + r_{AB} \cdot C_1$$

$$M_{AD} = - \frac{Fl_{AD}}{8} + r_{AD} \cdot C_1$$

$$M_{AE} = r_{AE} \cdot C_1$$

$$M_{AC} = r_{AC} \cdot C_1$$

2.2 Results of reference

Value of rotation and the moments in A .

2.3 Bibliographical references

- 1) Guides VPCS - Edition 1990.

3 Modelization A

3.1 Characteristic of the modelization

Elements POU_D_T

- 1 element for section *AG*
- 1 element for section *GD*
- 1 element for section *AE*
- 1 element for section *AC*
- 1 element for the section *AB*

Boundary conditions:

```
DDL_IMPO (
  TOUT=' OUI ',      DX=0, DRX=0, DRY=0
  NOEUD= (D, B, E),  DX=0, DY=0, DRZ=0
  NOEUD=C,           DX=0, DY=0
)
FORCE_NODALENOEUD=GFY      = -1. 105
FORCE_AUTREMAILLE=ABFY    = -1. 103
```

3.2 Characteristics of the mesh

5 elements POU_D_T
6 nodes

3.3 Quantities tested and results

Not	Quantity and unit	Reference	% difference
<i>A</i>	θ , rotation (<i>rad</i>)	0.227118	0.140
<i>A</i>	M_{AB} , moment (<i>Nm</i>)	- 11023.72	- 0.030
<i>A</i>	M_{AC} , moment (<i>Nm</i>)	- 113.559	0.140
<i>A</i>	M_{AD} , moment (<i>Nm</i>)	+12348.588	- 0.009
<i>A</i>	M_{AE} , moment (<i>Nm</i>)	- 1211.2994	0.120

4 Summary of the results

the results show the correct operation of elements `POU_D_T` in cross-bending under loading concentrated and distributed (`FORCE_POUTRE`).