

SSLV109 - Full cylinder in pressure nonuniform mode 1

Abstract:

This test validates all the elements of Fourier (triangles and quadrangles of degrees 1 and 2) in elasticity. The features are the following ones:

- variable pressure spaces some,
- displacements imposed,
- stiffness matrixes Fourier mode 1,
- nodal stresses Fourier mode 1,
- recombination of Fourier on displacements and stresses (modelization A),
- isotropic material transverse (modelization F).


The test has a quadratic analytical solution in displacements.

The interest of the test lies in:

- the comparison between solution calculated and analytical solution on the various finite elements,
- the comparison between the results and Code PERMAS on elements TRIA6 (modelization A).

1 Problem of reference

1.1 Geometry

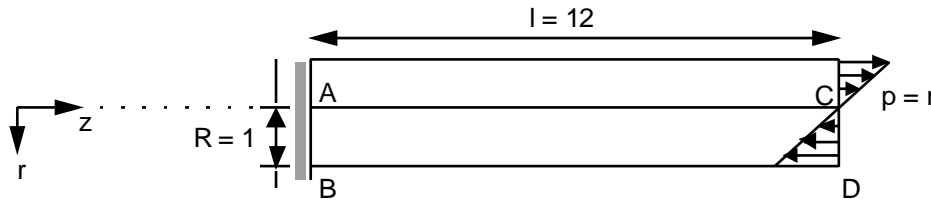

the modelled field is $ACDB$ (plane $\theta = 0$).

1.2 Material properties

$$E = 72 \text{ N/m}^2$$

$$\nu = 0.3$$

1.3 Boundary conditions and loadings

$$u_r(A) = u_z(A) = u_\theta(A) = 0$$

$$u_z(AB) = 0$$

$$p = \bar{p} \frac{r}{R} \cos \theta$$

with $\bar{p} = 1$. and $R = 1$ applied in $z = 12$.

1.4 Initial conditions

Without object for the static analysis.

2 Reference solution

2.1 Method of calculating used for the reference solution

$$u_r(r, z, \theta) = u(r, z) \cos \theta \quad \text{with } u(r, z) = \frac{M}{2EI} z^2 + \frac{v \bar{p}}{2ER} r^2$$

$$u_z(r, z, \theta) = v(r, z) \cos \theta \quad \text{with } v(r, z) = -\frac{\bar{p}}{2EI} r z$$

$$u_\theta(r, z, \theta) = w(r, z) (-\sin \theta) \quad \text{with } w(r, z) = \frac{M}{2EI} z^2 - \frac{v \bar{p}}{2ER} r^2$$

All the stresses are null except $\sigma_{zz}(r, z) = -\frac{\bar{p}}{R} r$.

The data were selected in such way that $u(x) = u(0, l) = 1$.

Displacements are thus written here:

$$u(r, z) = \frac{z^2}{144} + \frac{r^2}{480} ; \quad v(r, z) = -\frac{r z}{72} ; \quad w(r, z) = \frac{z^2}{144} - \frac{r^2}{480}$$

and:

$$\sigma_{zz}(r, z) = -r$$

2.2 Results of reference

$$u, v, w, \sigma_{zz} \quad \text{in } \begin{array}{l} r=0., 0.5, 1. \\ z=0., 6., 12. \end{array}$$

$$u_r, u_z, u_\theta \quad \begin{array}{l} r=0. \\ \text{formulates } z=6. \\ \theta=45^\circ \end{array}$$

2.3 of it on the analytical

solution Solution.


2.4 Bibliographical references

- 1) PERMAS-HS. Axisymmetric Continued with arbitrary loads. Stuttgart 1985. INTES publication n°224 pp 42 - 49.

3 Modelization A

3.1 Characteristic of the modelization

Number of the nodes: $A=N1$ $B=N3$ $C=N13$
 $D=N15$ $E=N7$ $F=N8$ $G=N9$

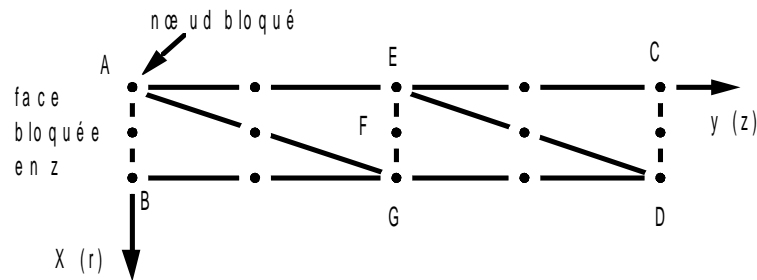

Limiting conditions:

```
DDL_IMPO:      ( THE NODE IS OUTSIDE THE FIELD OF DEFINITION WITH A
                 RIGHT PROFILE OF THE EXCLU TYPE NODE: A           DX =
                 0.  DY = 0.  DZ = 0.)
face AB        ( GROUP_NO : AB                                   DY = 0.)
```

Pressure on the face CD : PRES_REP (GROUP_MA: Boils NEAR: p)

p being defined by AFFE_CHAR_MECA_F by $p(X)=-X$

3.2 Characteristics of the mesh

Many nodes: 15

Number of meshes and types: 4 TRIA6, 1SEG3 on segment CD

4 Results of the modelization A

4.1 Values tested

| Node | Quantity | Reference |
|----------|---------------|--------------------------|
| <i>B</i> | <i>u</i> | 2.0833 10 ⁻³ |
| | <i>v</i> | 0. |
| | <i>w</i> | -2.0833 10 ⁻³ |
| | σ_{zz} | -1. |
| <i>E</i> | <i>u</i> | 0.25 |
| | <i>v</i> | 0. |
| | <i>w</i> | 0.25 |
| | σ_{zz} | 0. |
| <i>F</i> | <i>u</i> | 0.250521 |
| | <i>v</i> | -0.04166 |
| | <i>w</i> | 0.0249479 |
| | σ_{zz} | -0.5 |
| <i>G</i> | <i>u</i> | 0.252083 |
| | <i>v</i> | -0.083333 |
| | <i>w</i> | 0.247917 |
| | σ_{zz} | -1. |
| <i>C</i> | <i>u</i> | 1. |
| | <i>v</i> | 0. |
| | <i>w</i> | 1. |
| | σ_{zz} | 0. |
| <i>D</i> | <i>u</i> | 1.00208 |
| | <i>v</i> | -0.16666 |
| | <i>w</i> | 0.99791 |
| | σ_{zz} | -1. |


4.2 Remarks

the analytical solution is found with an accuracy < 0.02 for displacements and < 0.1 the stresses.
With a formula of numerical integration to 6 Gauss points (instead of 3) to compute: the stiffness, one would find the relation with 10^{-10} close (like PERMAS).

5 Modelization B

5.1 Characteristic of the modelization

Number of the nodes: $A=N1$ $B=N3$ $C=N13$
 $D=N15$ $E=N7$ $F=N8$ $G=N9$

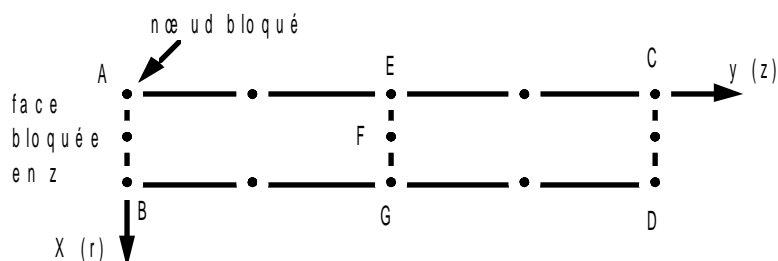

Limiting conditions:

DDL_IMPO: (THE NODE IS OUTSIDE THE FIELD OF DEFINITION WITH A
RIGHT PROFILE OF THE EXCLU TYPE NODE: A DX =
0. DY = 0. DZ = 0.)
face AB (GROUP_NO : AB DY = 0.)

Pressure on the face CD : PRES_REP (GROUP_MA: Boils NEAR: p)

p being defined by AFFE_CHAR_MECA_F by $p(X) = -X$

5.2 Characteristics of the mesh

Many nodes: 15

Number of meshes and types: 2 QUAD8, 1 SEG3 on segment CD

6 Results of the modelization B

6.1 Values tested

| Node | Quantity | Reference |
|----------|---------------|--------------------------|
| <i>B</i> | <i>u</i> | 2.0833 10 ⁻³ |
| | <i>v</i> | 0. |
| | <i>w</i> | -2.0833 10 ⁻³ |
| | σ_{zz} | -1. |
| <i>E</i> | <i>u</i> | 0.25 |
| | <i>v</i> | 0. |
| | <i>w</i> | 0.25 |
| | σ_{zz} | 0. |
| <i>F</i> | <i>u</i> | 0.250521 |
| | <i>v</i> | -0.04166 |
| | <i>w</i> | 0.0249479 |
| | σ_{zz} | -0.5 |
| <i>G</i> | <i>u</i> | 0.252083 |
| | <i>v</i> | -0.08333 |
| | <i>w</i> | 0.247917 |
| | σ_{zz} | -1. |
| <i>C</i> | <i>u</i> | 1. |
| | <i>v</i> | 0. |
| | <i>w</i> | 1. |
| | σ_{zz} | 0. |
| <i>D</i> | <i>u</i> | 1.00208 |
| | <i>v</i> | -0.16666 |
| | <i>w</i> | 0.99791 |
| | σ_{zz} | -1. |

6.2 Remarks

the analytical solution is found with 10 or 11 significant figures.

8 Results of the modelization C

8.1 Values tested

| Node | Quantity | Reference |
|----------|---------------|---------------------------|
| <i>B</i> | <i>u</i> | 2.0833 10 ⁻³ |
| | <i>v</i> | 0. |
| | <i>w</i> | - 2.0833 10 ⁻³ |
| | σ_{zz} | - 1. |
| <i>E</i> | <i>u</i> | 0.25 |
| | <i>v</i> | 0. |
| | <i>w</i> | 0.25 |
| | σ_{zz} | 0. |
| <i>F</i> | <i>u</i> | 0.250521 |
| | <i>v</i> | - 0.04166 |
| | <i>w</i> | 0.0249479 |
| | σ_{zz} | - 0.5 |
| <i>G</i> | <i>u</i> | 0.252083 |
| | <i>v</i> | - 0.08333 |
| | <i>w</i> | 0.247917 |
| | σ_{zz} | - 1. |
| <i>C</i> | <i>u</i> | 1. |
| | <i>v</i> | 0. |
| | <i>w</i> | 1. |
| | σ_{zz} | 0. |
| <i>D</i> | <i>u</i> | 1.00208 |
| | <i>v</i> | - 0.16666 |
| | <i>w</i> | 0.99791 |
| | σ_{zz} | - 1. |


8.2 Remarks

the analytical solution is found with 10 or 11 significant figures.

9 Modelization D

9.1 Characteristic of the modelization

Number of the nodes: $A=N1$ $B=N1129$ $C=N1369$
 $D=N2169$ $E=N141$ $F=N705$ $G=N1269$

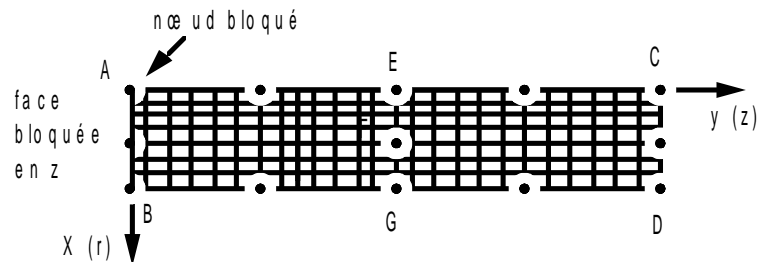

Limiting conditions:

```
DDL_IMPO:      ( THE NODE IS OUTSIDE THE FIELD OF DEFINITION WITH A
                 RIGHT PROFILE OF THE EXCLU TYPE NODE: A          DX
                 = 0.  DY = 0.  DZ = 0.)
face AB        ( GROUP_NO : AB                                DY = 0.)
```

Pressure on the face CD : PRES_REP (GROUP_MA: Boils NEAR: p)

p being defined by AFFE_CHAR_MECA_F by $p(x) = -x$

9.2 Characteristics of the mesh

Many nodes: 2169

Number of meshes and types: 1920 QUAD4, 8 SEG2 on segment CD

10 Results of the modelization D

10.1 Values tested

| Node | Quantity | Reference |
|----------|---------------|---------------------------|
| <i>B</i> | <i>u</i> | 2.0833 10 ⁻³ |
| | <i>v</i> | 0. |
| | <i>w</i> | - 2.0833 10 ⁻³ |
| | σ_{zz} | - 1. |
| <i>E</i> | <i>u</i> | 0.25 |
| | <i>v</i> | 0. |
| | <i>w</i> | 0.25 |
| | σ_{zz} | 0. |
| <i>F</i> | <i>u</i> | 0.250521 |
| | <i>v</i> | - 0.04166 |
| | <i>w</i> | 0.0249479 |
| | σ_{zz} | - 0.5 |
| <i>G</i> | <i>u</i> | 0.252083 |
| | <i>v</i> | - 0.083333 |
| | <i>w</i> | 0.247917 |
| | σ_{zz} | - 1. |
| <i>C</i> | <i>u</i> | 1. |
| | <i>v</i> | 0. |
| | <i>w</i> | 1. |
| | σ_{zz} | 0. |
| <i>D</i> | <i>u</i> | 1.00208 |
| | <i>v</i> | - 0.16666 |
| | <i>w</i> | 0.99791 |
| | σ_{zz} | - 1. |


10.2 Remarks

to obtain an accuracy of about 1% on the stresses, it is necessary to model structure very finely (8 elements radially and 240 axially).

11 Modelization E

11.1 Characteristic of the modelization

Number of the nodes: $A = N1$ $B = N2421$
 $E = N121$ $F = N1331$ $G = N2541$

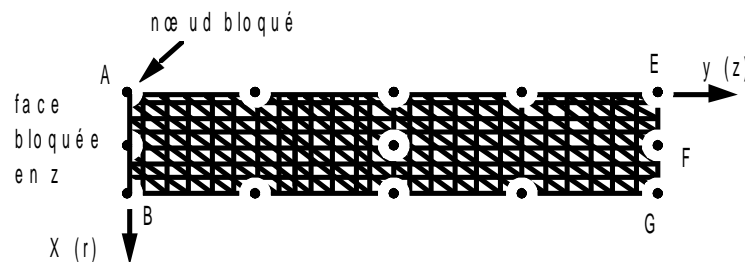

Limiting conditions:

```
DDL_IMPO:      ( THE NODE IS OUTSIDE THE FIELD OF DEFINITION WITH A
                 RIGHT PROFILE OF THE EXCLU TYPE NODE: A          DX =
                 0.  DY = 0.  DZ = 0.)
face AB        ( GROUP_NO : AB          DY = 0.)
```

Pressure on the face EG : PRES_REP (GROUP_MA: Boils NEAR: p)

p being defined by AFFE_CHAR_MECA_F by $p(x) = -x$

11.2 Characteristics of the mesh

Many nodes: 2541

Number of meshes and types: 4800 TRIA3, 20 SEG2 on segment EG

11.3 Remarques

to decrease the number of nodes, one modelled structure for $y \leq 6$.
The accuracy on the results is nevertheless less than for elements QUAD4.

12 Results of the modelization E

12.1 Values tested

| Node | Quantity | Reference |
|----------|---------------|---------------------------|
| <i>B</i> | <i>u</i> | 2.0833 10 ⁻³ |
| | <i>v</i> | 0. |
| | <i>w</i> | - 2.0833 10 ⁻³ |
| | σ_{zz} | - 1. |
| <i>E</i> | <i>u</i> | 0.25 |
| | <i>v</i> | 0. |
| | <i>w</i> | 0.25 |
| | σ_{zz} | 0. |
| <i>F</i> | <i>u</i> | 0.250521 |
| | <i>v</i> | - 0.04166 |
| | <i>w</i> | 0.249479 |
| | σ_{zz} | - 0.5 |
| <i>G</i> | <i>u</i> | 0.252083 |
| | <i>v</i> | - 0.083333 |
| | <i>w</i> | 0.247917 |
| | σ_{zz} | - 1. |

12.2 Remarks


the accuracy on displacements is lower than 3%, that on the stresses lower than 2%.

On this example, the TRIA3 converge definitely less quickly than the QUAD4 towards the exact solution.

13 Modelization F

13.1 Characteristic of the modelization

Number of the nodes: $A = N1$ $B = N3$ $C = N13$
 $D = N15$ $E = N7$ $G = N9$

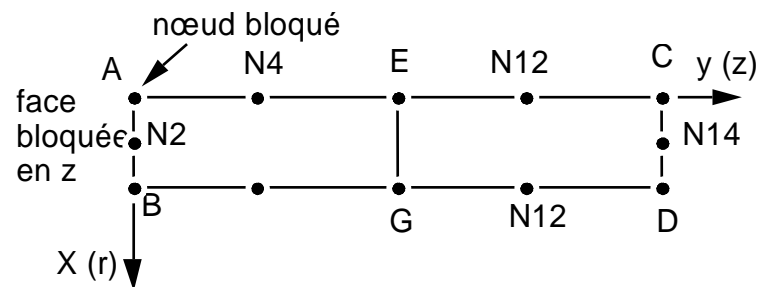

Conditions limiting:

```
DDL_IMPO:      ( THE NODE IS OUTSIDE THE FIELD OF DEFINITION WITH A
                 RIGHT PROFILE OF THE EXCLU TYPE NODE: A           DX =
                 0.  DY = 0.  DZ = 0.)
face AB        ( GROUP_NO : AB           DY = 0.)
```

Pressure on the face CD : PRES_REP (GROUP_MA: Boils NEAR: p)

p being defined by AFFE_CHAR_MECA_F by $p(X) = -X$

13.2 Characteristics of the mesh

Many nodes: 15

Number of meshes and types: 2 QUAD8, 1SEG3 on segment CD

14 Results of the modelization F

14.1 Values tested

| Node | Quantity | Reference |
|------|---------------|-------------|
| N2 | u | 2.6041666 |
| | w | - 2.6041666 |
| A | σ_{zz} | 0. |
| B | σ_{zz} | - 1. |
| N4 | u | 0.0625 |
| | w | 0.0625 |
| E | u | 0.25 |
| | w | 0.25 |
| | σ_{zz} | 0. |
| G | v | - 0.0833333 |
| | σ_{zz} | - 1. |
| N10 | u | 0.5625 |
| | w | 0.5625 |
| N12 | v | - 0.125 |
| C | u | 1. |
| | w | 1. |
| | σ_{zz} | 0. |
| N14 | v | - 0.0833333 |
| D | v | - 0.1666666 |
| | σ_{zz} | - 1. |

15 Summary of the results

the elements of order 2 give the analytical solution.

The elements of order 1 converge slowly towards the solution and require very fine meshes. Times computations remain however reasonable.