

HSNV120 - Hyperelastic traction of a bar under thermal loading

Summary:


This quasi-static thermomechanical test consists in heating a parallelepipedic bar uniformly, to subject it to an important traction for finally letting it return in a discharged state. One thus validates the kinematics of the great hyperelastic deformations (order `STAT_NON_LINE`, keyword `BEHAVIOR`) for a non-linear relation DEC elastic behavior (`ELAS_VMIS_LINE` and `ELAS_VMIS_TRAC`) with thermal loading.

The bar is modelled by a voluminal element (`HEXA20`, modeling A) or quadrangular (`QUAD8`, assumption of the plane constraints, modeling B).

Results got by *Aster* do not differ from the theoretical solution.


1 Problem of reference

1.1 Geometry

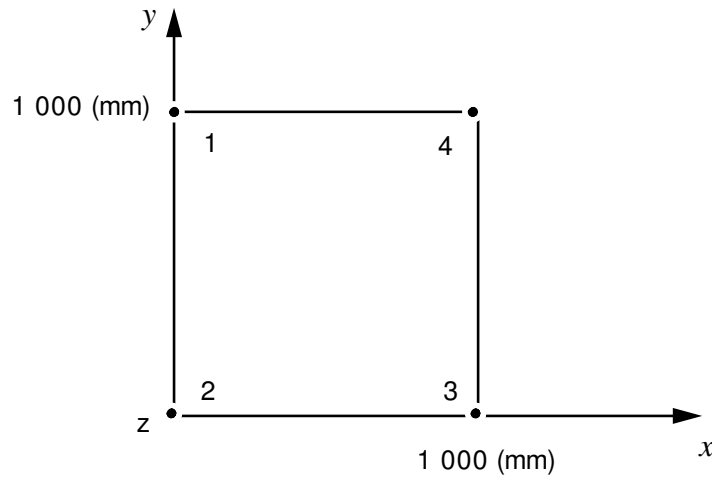

1.2 Material properties

The material obeys a law of isotropic nonlinear behaviour hyperelastic to isotropic linear work hardening.

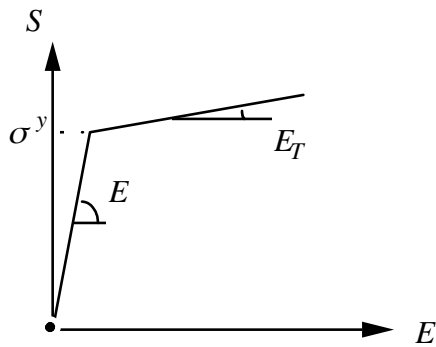

$$E = 2.10^5 \text{ MPa}$$

$$E_T = 2.10^3 \text{ MPa}$$




$$\sigma^y = 10^3 \text{ MPa}$$

$$\nu = 0,3$$

$$\alpha = 10^{-4} \text{ K}^{-1}$$

1.3 Boundary conditions and loadings

The bar blocked in the direction Ox on the face [1.2] is subjected to a uniform temperature T and a tractive effort F distributed on the face [3.4]. The sequences of loading are the following ones:

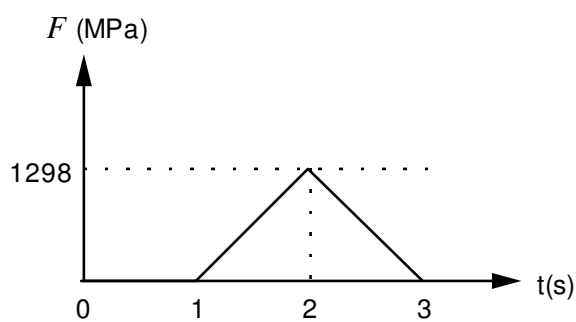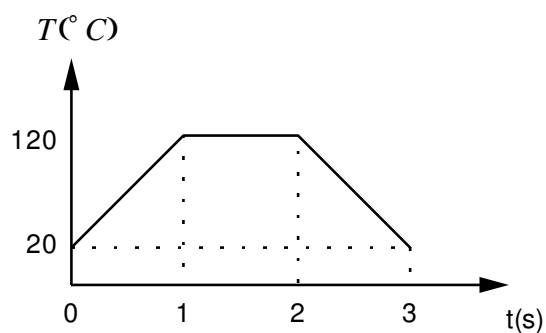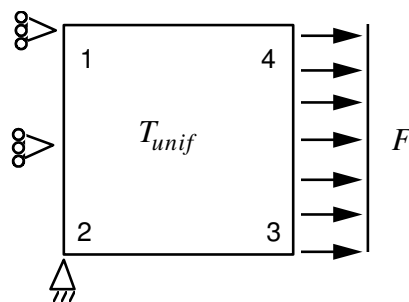

Temperature of reference: $T_{réf} = 20^\circ C$.

2 Reference solution

2.1 Method of calculating used for the reference solution

The field of displacement is sought U in the form:

$$U(x, y, z) = \begin{bmatrix} ux \\ vy \\ vz \end{bmatrix}$$

The gradient of the transformation, the deformation and its mechanical share are then:

$$\mathbf{F} = \begin{bmatrix} 1+u & 0 & 0 \\ 0 & 1+v & 0 \\ 0 & 0 & 1+v \end{bmatrix}$$

$$\mathbf{E} = \frac{1}{2}(\mathbf{F}^T \mathbf{F} - \mathbf{1}) = \begin{bmatrix} \frac{u(u+2)}{2} & 0 & 0 \\ 0 & \frac{v(v+2)}{2} & 0 \\ 0 & 0 & \frac{v(v+2)}{2} \end{bmatrix}$$

$$\mathbf{E}^m = \mathbf{E} - \alpha \Delta T \mathbf{1} = \begin{bmatrix} a & 0 & 0 \\ 0 & b & 0 \\ 0 & 0 & b \end{bmatrix}$$

with:

$$\begin{bmatrix} a \\ b \end{bmatrix} = \begin{bmatrix} \frac{u(u+2)}{2} - \alpha \Delta T \\ \frac{v(v+2)}{2} - \alpha \Delta T \end{bmatrix}$$

Note:

$$(E^m)_{\text{eq}} = |a - b| = a - b \quad (\text{it is supposed that } a > b)$$

The relation of behavior is written:

$$\begin{cases} S_{xx} = K(a+2b) + \frac{2}{3}G(a-b) \\ S_{yy} = S_{zz} = K(a+2b) - \frac{1}{3}G(a-b) \end{cases}$$

with:

$$3K = \frac{E}{1-2\nu} \quad \text{module de compressibilité}$$

To determine G by taking account of linear work hardening, one introduces:

- the modulus of rigidity: $2\mu = \frac{E}{1+\nu}$
- the module of work hardening: $R' = \frac{E E_T}{E - E_T}$,

The "internal variable pseudonym" p is worth then:

$$p = \frac{2\mu(\mathbf{E}^m)_{eq} - \sigma^y}{R' + 3\mu} = \frac{2\mu(a-b) - \sigma^y}{R' + 3\mu}$$

Finally, G is written:

$$G = \frac{\sigma^y + R' p}{a-b}$$

By taking account of the boundary conditions:

$$\begin{cases} S_{xx} = \frac{F}{1+u} & \text{(charge morte)} \\ S_{yy} = 0 & \text{(bord libre)} \end{cases}$$

The system to be solved is written:

$$\begin{cases} K(a+2b) + \frac{2}{3}\sigma^y + R' \frac{2\mu(a-b) - \sigma^y}{R' + 3\mu} = \frac{F}{1+u} \\ K(a+2b) - \frac{1}{3}\sigma^y + R' \frac{2\mu(a-b) - \sigma^y}{R' + 3\mu} = 0 \end{cases}$$

He is also written:

$$\begin{cases} 3K(a+2b) = \frac{F}{1+u} \\ 2\mu(a-b) = \frac{F}{1+u} \left[1 + \frac{3\mu}{R'} \right] - \sigma^y \frac{3\mu}{R'} \end{cases}$$

With F fixed, it is thus about a nonlinear system in u and v , since a is quadratic in u and b quadratic in v .

Nevertheless, one can choose to fix u (thus a) and to solve a linear system in F and b (from which one deduces p and v):

- $a = \frac{u(u+2)}{2} - \alpha \Delta T$
- $\frac{1}{1+u} F - 6Kb = 3Ka$
- $\left[1 + \frac{3\mu}{R'} \right] \frac{1}{1+u} F + 2\mu b = 2\mu a + \sigma^y \frac{3\mu}{R'}$
- $p = \frac{2\mu(a-b) - \sigma^y}{R' + 3\mu}$
- $v = \sqrt{1 + 2(b + a \Delta T)} - 1$

It then remains to express the constraint of Cauchy:

$$\boldsymbol{\sigma} = \frac{1}{\text{Det}(\mathbf{F})} \mathbf{F} \cdot \mathbf{S} \cdot \mathbf{F}^T$$

That is to say here:

$$\begin{cases} \sigma_{xx} = \frac{1+u}{(1+v)^2} S_{xx} \\ \sigma_{yy} = \sigma_{zz} = 0 \end{cases}$$

As for the force exerted on the face [3,4], because of assumption of died loads, she is written simply:

$$\begin{cases} \mathbf{F}_x = F S_o & \text{où } S_o : \text{ surface initiale de la face [3,4]} \\ \mathbf{F}_y = 0 \\ \mathbf{F}_z = 0 \end{cases}$$

2.2 Results of reference

One will adopt like results of reference displacements, the constraint of Cauchy and the force exerted on the face [3,4] (in 3D only):

At time $t=2$ s ($\Delta T=100^\circ C$, traction F)

In fact, one seeks F such as lengthening:

$$u = 0,1$$

- $K=166666$ MPa $\mu=76923$ MPa $R'=2020$ MPa
- $a=0.095$

$$\begin{cases} 0.90909 F - 10^6 b = 47500 \\ 104.76 F + 153.85 \cdot 10^3 b = 128.85 \cdot 10^3 \end{cases}$$

- $\Rightarrow \begin{cases} F = 1298 \text{ MPa} \\ b = -0.046 \end{cases}$

$$\Rightarrow \begin{cases} F = 1298 \text{ MPa} \\ b = -0.046 \end{cases}$$

- $p = 8.91 \cdot 10^{-2}$
- $v = -3.70 \cdot 10^{-2}$

$$\begin{array}{lll} \sigma_{xx} = 1399.66 \text{ MPa} & \sigma_{xy} = 0 & F_x = 1298 \cdot 10^9 \text{ N} \\ \sigma_{yy} = 0 & \sigma_{xz} = 0 & F_y = 0 \\ \sigma_{zz} = 0 & \sigma_{yz} = 0 & F_z = 0 \end{array}$$

At time $t=3$ s ($\Delta T=0$, $F=0$)

The bar returned in its initial state:

$$\begin{cases} \mathbf{U} = 0 \\ \boldsymbol{\sigma} = 0 \\ p = 0 \end{cases}$$

2.3 Uncertainty on the solution

The solution is analytical. With the rounding errors near, one can consider it exact.

2.4 Bibliographical references

One will be able to refer to:


- 1) E. LORENTZ: A nonlinear relation of behavior hyperelastic - Note interns EDF DER HI-74/95/011/0

3 Modeling A

3.1 Characteristics of modeling

Voluminal modeling:

1 mesh HEXA20
1 mesh QUAD8

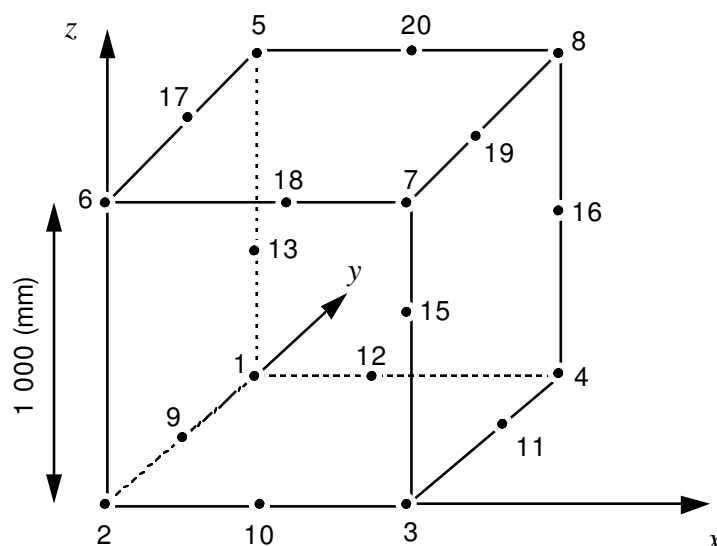

Boundary conditions:

$$\begin{aligned}
 N2 : U_x = U_y = U_z = 0 & \quad N9, \quad N13, \quad N14, \quad N5, \quad N17 : \\
 N1 : U_x = U_z = 0 & \quad U_x = 0 \\
 N6 : U_x = U_y = 0 &
 \end{aligned}$$

Load: Traction on the face [3 4 8 7 11 16 19 15]

3.2 Characteristics of the grid

Many nodes: 20

Many meshes: 2

1 HEXA20
1 QUAD8

3.3 Sizes tested and results


Identification	Reference
$t=2$ Displacement DX ($N8$)	100
$t=2$ Displacement DY ($N8$)	- 37
$t=2$ Displacement DZ ($N8$)	- 37
$t=2$ Constraints $SIGXX$ (PGI)	1399.66
$t=2$ Constraints $SIGYY$ (PGI)	11013.986
$t=2$ Constraints $SIGZZ$ (PGI)	0
$t=2$ Constraints $SIGXY$ (PGI)	0
$t=2$ Constraints $SIGXZ$ (PGI)	0
$t=2$ Constraints $SIGYZ$ (PGI)	0
$t=2$ Variable P $VARI$ (PGI)	8.9110^{-2}
<hr/>	
$t=3$ Displacement DX ($N8$)	0
$t=3$ Displacement DY ($N8$)	0
$t=3$ Displacement DZ ($N8$)	0
$t=3$ Constraints $SIGXX$ (PGI)	0
$t=3$ Constraints $SIGYY$ (PGI)	0
$t=3$ Constraints $SIGZZ$ (PGI)	0
$t=3$ Constraints $SIGXY$ (PGI)	0
$t=3$ Constraints $SIGXZ$ (PGI)	0
$t=3$ Constraints $SIGYZ$ (PGI)	0
$t=3$ Variable P $VARI$ (PGI)	0
<hr/>	
$t=2$ Nodal force DX ($N8$)	- 1.081710 ⁸
$t=2$ Nodal force DY ($N8$)	0
$t=2$ Nodal force DZ ($N8$)	0

3.4 Remarks

Calculation of the nodal force:

The force applied to the face [3,4], F_x , is distributed between the various nodes according to following weighting:

- nodes tops: $-1/12 F_x$
- nodes mediums: $4/12 F_x$

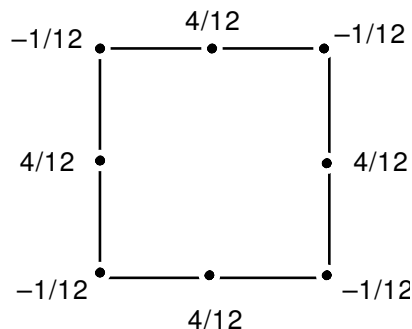


4 Modeling B

4.1 Characteristics of modeling

Modeling 2D plane constraints:

1 mesh QUAD8

1 mesh SEG3

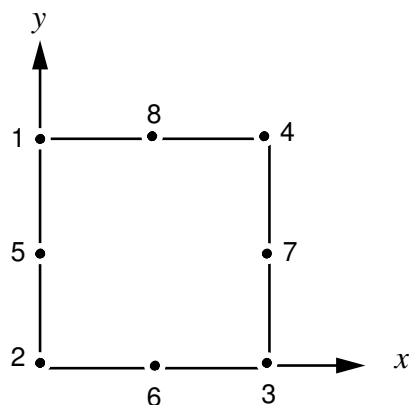

Boundary conditions:

$$N2 : \quad U_x = 0 \quad U_y = 0$$

$$N1 : \quad U_x = 0$$

$$N5 : \quad U_x = 0$$

Loading:

Traction on the face [3 4 7] (mesh SEG3)

4.2 Characteristics of the grid

Many nodes: 8

Many meshes: 2

1 QUAD8

1 SEG3

4.3 Sizes tested and results

	Identification	Reference
$t=2$	Displacement DX ($N4$)	100
$t=2$	Displacement DY ($N4$)	-37
$t=2$	Constraints $SIGXX$ ($PG1$)	1399.66
$t=2$	Constraints $SIGYY$ ($PG1$)	0
$t=2$	Constraints $SIGXY$ ($PG1$)	0
$t=2$	Variable P $VARI$ ($PG1$)	8.9110^{-2}
$t=3$	Displacement DX ($N4$)	0
$t=3$	Displacement DY ($N4$)	0
$t=3$	Constraints $SIGXX$ ($PG1$)	0
$t=3$	Constraints $SIGYY$ ($PG1$)	0
$t=3$	Constraints $SIGXY$ ($PG1$)	0
$t=3$	Variable P $VARI$ ($PG1$)	0

Warning : The translation process used on this website is a "Machine Translation". It may be imprecise and inaccurate in whole or in part and is provided as a convenience.

Copyright 2019 EDF R&D - Licensed under the terms of the GNU FDL (<http://www.gnu.org/copyleft/fdl.html>)

5 Summary of the results

The digital and analytical results coincide remarkably. One can however be astonished by the execution time manifestly longer for modeling in plane constraints (123,8 s) that for 3D (47,2 s). The difference is explained by a discretization in time much finer for the plane constraints, related to problems of convergence (the algorithm of resolution of the nonlinear scalar equation in P is still rudimentary).