

SSNV127 - Cylinder in a boring with contact and friction

Summary:

This problem corresponds to a quasi-static analysis of a problem of mechanics with contact and friction. A cylinder is compressed in a cylindrical boring of slightly higher diameter by a concentrated force applied to its axis.

This test, named "problem of Klang", is rather largely used in the literature to validate modelings of contact with friction and was in particular used by P. Alart and A. Curnier [bib1] to validate their finite elements of contact and friction.

Five modelings 2D are proposed (A, B, C and D with linear elements and E with quadratic elements):

Modeling A tests the algorithm of the method "LAGRANGIAN" with master-slave pairing.

Modeling B tests the algorithm of the method "LAGRANGIAN" with nodal pairing.

Modeling C tests the algorithm of the method "PENALIZATION" with master-slave pairing, the penalization relates only to friction.

Modeling D tests the algorithm of the method "PENALIZATION" with master-slave pairing, the penalization relates to the contact and friction.

Modeling E tests the algorithm of the method "LAGRANGIAN" with master-slave pairing.

Modelings F and H test the algorithm of the method "CONTINUOUS" with quadratic elements (SEG3) and linear (SEG2) of contact, respectively.


The results are compared with an analytical solution given by Klang [bib2].

Instead of reproducing this relatively complicated analytical solution we will use the values of the pressures obtained from this one [bib1].

1 Problem of reference

1.1 Geometry

Contraintes planes

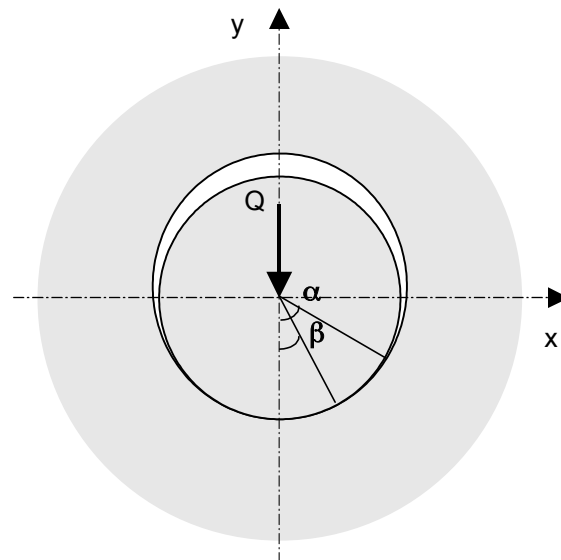

α = angle de contact
 β = angle pour le glissement

Ray of the cylinder: $r = 5.999 \text{ cm}$.

Ray of boring: $R = 6. \text{ cm}$.

Position of the points of reference on the surface of contact: a point all three degrees of angle starting from bottom, until 60° .

1.2 Material properties

Cylinder and boring:

Young modulus: $E = 2.1 \cdot 10^{11} \text{ N/m}^2$

Poisson's ratio: $\nu = 0.3$

Coefficient of friction: $\mu = 0.4$

1.3 Boundary conditions and loadings

The solid mass containing boring is supposed infinite being, its displacements will be blocked (according to X and there) on a concentric circle with boring.

The cylinder is subjected to a force distributed Q according to the thickness (z) being worth:

$$Q = -1875 \cdot 10^3 \text{ N/m} .$$

This force is applied in an increment.

2 Reference solution

2.1 Method of calculating used for the reference solution

The reference solution is analytical [bib2].

2.2 Results of reference

Prediction on the zone of contact: 60 degrees.

Prediction on the beginning of the zone of slip: 26.2 degrees.

Efforts of pressure on the points of the surface of contact:

Identification		Reference
SIXX for an angle of	0°	- 1.7813E+07
SIXX	3°	- 1.7813E+07
SIXX	6°	- 1.7750E+07
SIXX	9°	- 1.7688E+07
SIXX	12°	- 1.7594E+07
SIXX	15°	- 1.7470E+07
SIXX	18°	- 1.7312E+07
SIXX	21°	- 1.7125E+07
SIXX	24°	- 1.6906E+07
SIXX	27°	- 1.6656E+07
SIXX	30°	- 1.6343E+07
SIXX	33°	- 1.5937E+07
SIXX	36°	- 1.5406E+07
SIXX	39°	- 1.4781E+07
SIXX	42°	- 1.4031E+07
SIXX	45°	- 1.3094E+07
SIXX	48°	- 1.1169E+07
SIXX	51°	-1.0593E+07

2.3 Bibliographical references

- 1) P. Alart, A. Curnier "with mixed formulation for frictional contact problems" Methods Computer in Applied Mechanics and Engineering (1991) p. 353-375
- 2) Mr. Klang "One interior contact under friction between cylindrical elastic bodies in contact" Thesis, Linköping University, Linköping, 1979.


3 Modeling A

3.1 Characteristics of modeling

The symmetry of the problem makes it possible to model only half of it ($X \geq 0$).

60 finite elements SEG2 are laid out regularly on the initial surface of contact (3 degrees of angle for each one).

The cylinder and circular volume surrounding boring are with a grid with elements QUA4 and TRIA3.

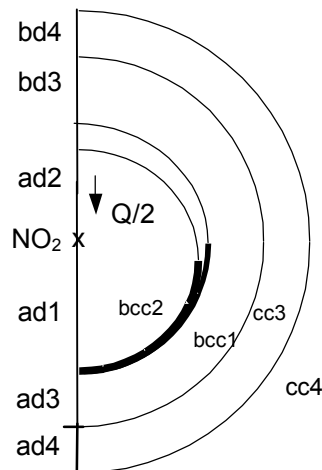

```
CONTACT
METHOD = 'LAGRANGIAN'
COULOMB = 0.4
```

```
APPARIEMENT=' MAIT_ESCL'
Master: bcc1
Slave: bcc2
```

Boundary condition:

- on GROUP_MA $CC4$: $DX=0, DY=0$.
 - on GROUP_MA $AD1, AD2, AD3, AD4, BD3$ $DX=0$.
- , and $BD4$:

Loadings:

The symmetry of the problem compared to the plan $x=0$ allows to model the force concentrated by a nodal force $F_y = -937.5 \cdot 10^3 \text{ N}$, equivalent to $Q/2$ for a cylinder length unit, applied to the group of nodes O_2 , center of the cylinder.

This force is applied into 1 increment.

3.2 Characteristics of the grid

Many nodes: 1281
Many meshes and types: 128 SEG2
156 TRIA3
1108 QUAD4

3.3 Values tested: SIGM_ELNO

One tests the efforts of normal pressure generated by contact-friction. These efforts defined in polar coordinates are expressed in MPa .

Identification	Reference	Aster	% difference
SIXX for an angle of 0°	$-1.7813E+07$	$-1.79080E+07$	0,534
SIXX 3°	$-1.7813E+07$	$-1.88485E+07$	5,814
SIXX 6°	$-1.7750E+07$	$-1.89858E+07$	6,962
SIXX 9°	$-1.7688E+07$	$-1.88134E+07$	6,363

Warning : The translation process used on this website is a "Machine Translation". It may be imprecise and inaccurate in whole or in part and is provided as a convenience.


Copyright 2017 EDF R&D - Licensed under the terms of the GNU FDL (<http://www.gnu.org/copyleft/fdl.html>)

SIXX	12°	- 1.7594E+07	- 1.85821E+07	5,616
SIXX	15°	- 1.7470E+07	- 1.83315E+07	4,931
SIXX	18°	- 1.7312E+07	- 1.78831E+07	3,299
SIXX	21°	- 1.7125E+07	- 1.74723E+07	2,028
SIXX	24°	- 1.6906E+07	- 1.67279E+07	- 1,053
SIXX	27°	- 1.6656E+07	- 1.60957E+07	- 3,364
SIXX	30°	- 1.6343E+07	- 1.56801E+07	- 4,056
SIXX	33°	- 1.5937E+07	- 1.57565E+07	- 1,132
SIXX	36°	- 1.5406E+07	- 1.55705E+07	1,068
SIXX	39°	- 1.4781E+07	- 1.51262E+07	2,336
SIXX	42°	- 1.4031E+07	- 1.43093E+07	1,984
SIXX	45°	- 1.3094E+07	- 1.33902E+07	2,262
SIXX	48°	- 1.1169E+07	- 1.24478E+07	11,450
SIXX	51°	-1.0593E+07	-1.11500E+07	5,259

4 Modeling B

4.1 Characteristics of modeling

This modeling is identical to modeling A (and in particular grid). Only the method of pairing differs which here is "NODAL".

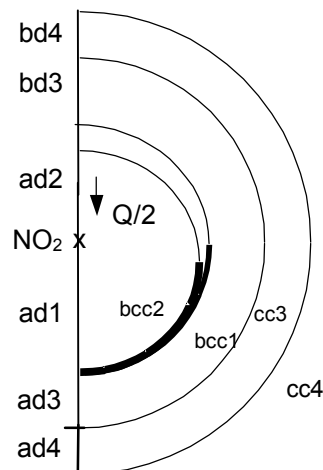

CONTACT
METHOD = 'LAGRANGIAN'
COULOMB = 0.4

APPARIEMENT=' NODAL '

4.2 Values tested: SIGM_ELNO


One tests the efforts of normal pressure generated by contact-friction. These efforts defined in polar coordinates are expressed in *MPa*.

Identification	Reference	Aster	% difference
SIXX for an angle of 0°	- 1.7813E+07	- 1.86019E+07	4,429
SIXX 3°	- 1.7813E+07	- 1.93157E+07	8,436
SIXX 6°	- 1.7750E+07	- 1.93512E+07	9,021
SIXX 9°	- 1.7688E+07	- 1.91026E+07	7,998
SIXX 12°	- 1.7594E+07	- 1.88145E+07	6,937
SIXX 15°	- 1.7470E+07	- 1.85112E+07	5,960
SIXX 18°	- 1.7312E+07	- 1.80078E+07	4,019
SIXX 21°	- 1.7125E+07	- 1.75572E+07	2,524
SIXX 24°	- 1.6906E+07	- 1.67641E+07	- 0,839
SIXX 27°	- 1.6656E+07	- 1.63429E+07	- 1,879
SIXX 30°	- 1.6343E+07	- 1.63762E+07	0,203
SIXX 33°	- 1.5937E+07	- 1.63898E+07	2,842
SIXX 36°	- 1.5406E+07	- 1.59991E+07	3,850
SIXX 39°	- 1.4781E+07	- 1.53865E+07	4,097
SIXX 42°	- 1.4031E+07	- 1.44452E+07	2,952
SIXX 45°	- 1.3094E+07	- 1.34146E+07	2,449
SIXX 48°	- 1.1169E+07	- 1.23898E+07	10,931
SIXX 51°	-1.0593E+07	-1.08630E+07	2,549

5 Modeling C

5.1 Characteristics of modeling

This modeling is identical to modeling A (and in particular grid). Only the method of resolution differs which is here "PENALIZATION" with penalization only on friction.

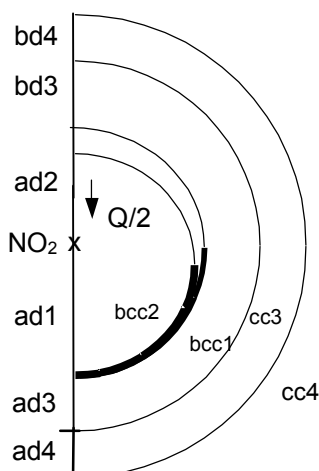

```
CONTACT
METHOD = `PENALIZATION
COULOMB = 0.4

APPARIEMENT=' MAIT_ESCL'
Master: bcc1
Slave: bcc2
```

5.2 Values tested: SIGM_ELNO


One tests the efforts of normal pressure generated by contact-friction. These efforts defined in polar coordinates are expressed in *MPa*.

Identification	Reference	Aster	% difference
SIXX for an angle of 0°	-1.7813E+07	-1.86714E+07	4,819
SIXX 3°	-1.7813E+07	-1.97269E+07	10,745
SIXX 6°	-1.7750E+07	-1.99928E+07	12,636
SIXX 9°	-1.7688E+07	-1.98849E+07	12,421
SIXX 12°	-1.7594E+07	-1.97193E+07	12,080
SIXX 15°	-1.7470E+07	-1.95408E+07	11,854
SIXX 18°	-1.7312E+07	-1.91611E+07	10,681
SIXX 21°	-1.7125E+07	-1.88051E+07	9,811
SIXX 24°	-1.6906E+07	-1.82459E+07	7,926
SIXX 27°	-1.6656E+07	-1.78217E+07	6,999
SIXX 30°	-1.6343E+07	-1.71305E+07	4,819
SIXX 33°	-1.5937E+07	-1.64093E+07	2,964
SIXX 36°	-1.5406E+07	-1.55834E+07	1,152
SIXX 39°	-1.4781E+07	-1.46776E+07	-0,699
SIXX 42°	-1.4031E+07	-1.36676E+07	-2,589
SIXX 45°	-1.3094E+07	-1.27603E+07	-2,548
SIXX 48°	-1.1169E+07	-1.24156E+07	11,161
SIXX 51°	-1.0593E+07	-1.08692E+07	2,608

6 Modeling D

6.1 Characteristics of modeling

This modeling is identical to modeling A (and in particular grid). Only the method of resolution differs which is here "PENALIZATION" with penalization on the contact and friction.

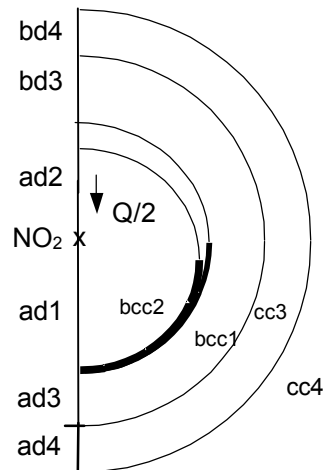

```
CONTACT
METHOD = 'PENALIZATION'
COULOMB = 0.4

APPARIEMENT=' MAIT_ESCL'
Master: bcc1
Slave: bcc2
```

6.2 Values tested: SIGM_ELNO

One tests the efforts of normal pressure generated by contact-friction. These efforts defined in polar coordinates are expressed in *MPa*.

Identification	Reference	Aster	% difference
SIXX for an angle of 0°	-1.7813E+07	-1.867141E+07	4,819
SIXX 3°	-1.7813E+07	-1.972695E+07	10,745
SIXX 6°	-1.7750E+07	-1.999288E+07	12,636
SIXX 9°	-1.7688E+07	-1.988495E+07	12,421
SIXX 12°	-1.7594E+07	-1.971935E+07	12,080
SIXX 15°	-1.7470E+07	-1.954087E+07	11,854
SIXX 18°	-1.7312E+07	-1.916115E+07	10,681
SIXX 21°	-1.7125E+07	-1.880513E+07	9,811
SIXX 24°	-1.6906E+07	-1.824592E+07	7,926
SIXX 27°	-1.6656E+07	-1.782171E+07	6,999
SIXX 30°	-1.6343E+07	-1.713057E+07	4,819
SIXX 33°	-1.5937E+07	-1.640937E+07	2,964
SIXX 36°	-1.5406E+07	-1.558344E+07	1,152
SIXX 39°	-1.4781E+07	-1.467761E+07	-0,699
SIXX 42°	-1.4031E+07	-1.366763E+07	-2,590
SIXX 45°	-1.3094E+07	-1.276022E+07	-2,549
SIXX 48°	-1.1169E+07	-1.241550E+07	11,160
SIXX 51°	-1.0593E+07	-1.086923E+07	2,608


7 Modeling E

7.1 Characteristics of modeling

The symmetry of the problem makes it possible to model only half of it ($X \geq 0$).

30 finite elements SEG3 are laid out regularly on surface of contact. Because of curve of these elements, one uses the method of projection "QUADRATIC".

The cylinder and circular volume surrounding boring are with a grid with elements QUA8 and TRIA6.

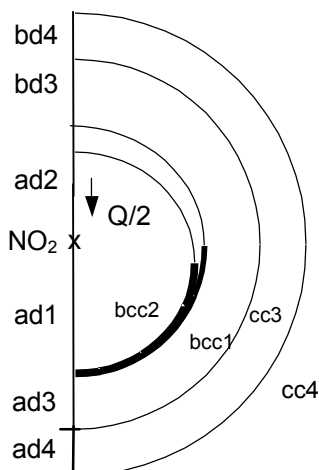

```
CONTACT
METHOD = 'LAGRANGIAN'
COULOMB = 0.4

APPARIEMENT=' MAIT_ESCL'
Master: bcc1
Slave: bcc2
```

Boundary condition:

- on GROUP_MA CC4 : $DX = 0, DY = 0.$
- on GROUP_MA AD1, AD2, AD3, AD4, BD3, BD4 : $DX = 0.$

Loadings:

The symmetry of the problem compared to the plan $x = 0$ allows to model the force concentrated by a nodal force $F_y = -937.5 \cdot 10^3 N$, equivalent to $Q/2$ for a cylinder length unit, applied to the group of nodes O_2 , center of the cylinder.

This force is applied into 1 increment.

7.2 Characteristics of the grid

Many nodes: 1603
Many meshes and types: 88 SEG3
58 TRIA6
456 QUA8

7.3 Values tested: SIGM_ELNO

One tests the efforts of normal pressure generated by contact-friction. These efforts defined in polar coordinates are expressed in MPa .

Identification	Reference	Aster	% difference
SIXX for an angle of 0°	-1.7813E+07	- 1.87916E+07	5,494
SIXX 3°	- 1.7813E+07	- 1.87072E+07	5,020

Warning : The translation process used on this website is a "Machine Translation". It may be imprecise and inaccurate in whole or in part and is provided as a convenience.

Copyright 2017 EDF R&D - Licensed under the terms of the GNU FDL (<http://www.gnu.org/copyleft/fdl.html>)

SIXX	6°	- 1.7750E+07	- 1.85202E+07	4,340
SIXX	9°	- 1.7688E+07	- 1.83433E+07	3,705
SIXX	12°	- 1.7594E+07	- 1.81013E+07	2,884
SIXX	15°	- 1.7470E+07	- 1.77266E+07	1,469
SIXX	18°	- 1.7312E+07	- 1.74321E+07	0,694
SIXX	21°	- 1.7125E+07	- 1.68102E+07	- 1,838
SIXX	24°	- 1.6906E+07	- 1.64256E+07	- 2,841
SIXX	27°	- 1.6656E+07	- 1.62913E+07	- 2,189
SIXX	30°	- 1.6343E+07	- 1.57932E+07	- 3,364
SIXX	33°	- 1.5937E+07	- 1.55232E+07	- 2,596
SIXX	36°	- 1.5406E+07	- 1.48572E+07	- 3,562
SIXX	39°	- 1.4781E+07	- 1.41428E+07	- 4,317
SIXX	42°	- 1.4031E+07	- 1.28218E+07	- 8,618
SIXX	45°	- 1.3094E+07	- 1.19407E+07	- 8,808
SIXX	48°	- 1.1169E+07	- 1.07287E+07	- 3,942
SIXX	51°	-1.0593E+07	-9.70591E+06	-8,374


8 Modeling F

8.1 Characteristics of modeling

The symmetry of the problem makes it possible to model only half of it ($X \geq 0$).

60 finite elements SEG3 are laid out regularly on the initial surface of contact (3 degrees of angle for each one).

The cylinder and circular volume surrounding boring are with a grid with elements QUA8 and TRIA6.

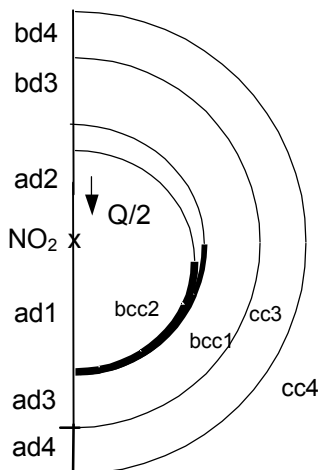

CONTACT
METHOD = 'CONTINUES'
COULOMB = 0.4

APPARIEMENT=' MAIT_ESCL'
Master: bcc1
Slave: bcc2

Boundary condition:

- on GROUP_MA CC4 : $DX = 0, DY = 0.$
- on GROUP_MA AD1, AD2, AD3, AD4, BD3, BD4 : $DX = 0.$

Loadings:

The symmetry of the problem compared to the plan $x = 0$ allows to model the force concentrated by a nodal force $F_y = -937.5 \cdot 10^3 N$, equivalent to $Q/2$ for a cylinder length unit, applied to the group of nodes O_2 , center of the cylinder.

This force is applied into 1 increment.

8.2 Characteristics of the grid

Many nodes: 1603
Many meshes and types: 88 SEG3
58 TRIA6
456 QUAD8

8.3 Values tested: SIGM_ELNO

One tests the efforts of normal pressure generated by contact-friction. These efforts defined in polar coordinates are expressed in MPa .

Identification	Reference	Aster	% difference
SIXX for an angle of 0°	- 1.7813E+07	- 1.88235E+07	5,673
SIXX 3°	- 1.7813E+07	- 1.87386E+07	5,196
SIXX 6°	- 1.7750E+07	- 1.85220E+07	4,349
SIXX 9°	- 1.7688E+07	- 1.84104E+07	4,084
SIXX 12°	- 1.7594E+07	- 1.81071E+07	2,917

Warning : The translation process used on this website is a "Machine Translation". It may be imprecise and inaccurate in whole or in part and is provided as a convenience.

Copyright 2017 EDF R&D - Licensed under the terms of the GNU FDL (<http://www.gnu.org/copyleft/fdl.html>)

SIXX	15°	- 1.7470E+07	- 1.78019E+07	1,900
SIXX	18°	- 1.7312E+07	- 1.73913E+07	0,458
SIXX	21°	- 1.7125E+07	- 1.68233E+07	1,762
SIXX	24°	- 1.6906E+07	- 1.65322E+07	- 2,211
SIXX	27°	- 1.6656E+07	- 1.63678E+07	- 1,730
SIXX	30°	- 1.6343E+07	- 1.60549E+07	- 1,763
SIXX	33°	- 1.5937E+07	- 1.56070E+07	- 2,071
SIXX	36°	- 1.5406E+07	- 1.48829E+07	- 3,395
SIXX	39°	- 1.4781E+07	- 1.41776E+07	- 4,082
SIXX	42°	- 1.4031E+07	- 1.29292E+07	- 7,852
SIXX	45°	- 1.3094E+07	- 1.19737E+07	- 8,555
SIXX	48°	- 1.1169E+07	- 1.06929E+07	- 4,263
SIXX	51°	-1.0593E+07	-0.96396E+07	- 8,999


9 Modeling H

9.1 Characteristics of modeling

The symmetry of the problem makes it possible to model only half of it ($X \geq 0$).

60 finite elements SEG2 are laid out regularly on the initial surface of contact (3 degrees of angle for each one).

The cylinder and circular volume surrounding boring are with a grid with elements QUA4 and TRIA3.

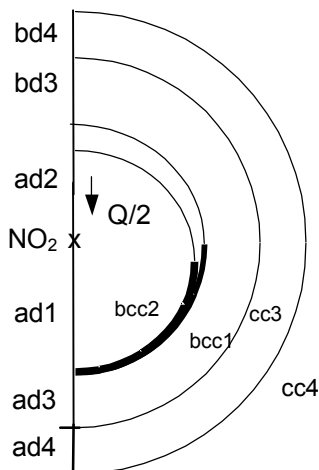

CONTACT
METHOD = 'CONTINUES'
COULOMB = 0.4

APPARIEMENT=' MAIT_ESCL'
Master: bcc1
Slave: bcc2

Boundary condition:

- on GROUP_MA CC4 : $DX = 0, DY = 0$.
- on GROUP_MA AD1, AD2, AD3, AD4, BD3, BD4 : $DX = 0$.

Loadings:

The symmetry of the problem compared to the plan $x = 0$ allows to model the force concentrated by a nodal force $F_y = -937.5 \cdot 10^3 N$, equivalent to $Q/2$ for a cylinder length unit, applied to the group of nodes O_2 , center of the cylinder.

This force is applied into 1 increment.

9.2 Characteristics of the grid

Many nodes: 1282
Many meshes and types: 128 SEG2
162 TRIA3
1106 QUAD4

9.3 Values tested: SIGM_ELNO

One tests the efforts of normal pressure generated by contact-friction. These efforts defined in polar coordinates are expressed in MPa .

Identification	Reference	Aster	% difference
SIXX for an angle of 0°	- 1.7813E+07	- 1.79054E+07	0,519
SIXX 3°	- 1.7813E+07	- 1.88551E+07	5,850
SIXX 6°	- 1.7750E+07	- 1.89952E+07	7,015
SIXX 9°	- 1.7688E+07	- 1.88212E+07	6,407
SIXX 12°	- 1.7594E+07	- 1.85900E+07	5,661

Warning : The translation process used on this website is a "Machine Translation". It may be imprecise and inaccurate in whole or in part and is provided as a convenience.

Copyright 2017 EDF R&D - Licensed under the terms of the GNU FDL (<http://www.gnu.org/copyleft/fdl.html>)

SIXX	15°	- 1.7470E+07	- 1.83361E+07	4,958
SIXX	18°	- 1.7312E+07	- 1.78879E+07	3,327
SIXX	21°	- 1.7125E+07	- 1.74676E+07	2,001
SIXX	24°	- 1.6906E+07	- 1.67457E+07	- 0,948
SIXX	27°	- 1.6656E+07	- 1.60969E+07	- 3,357
SIXX	30°	- 1.6343E+07	- 1.56549E+07	- 4,211
SIXX	33°	- 1.5937E+07	- 1.57323E+07	- 1,284
SIXX	36°	- 1.5406E+07	- 1.55859E+07	1,168
SIXX	39°	- 1.4781E+07	- 1.51202E+07	2,295
SIXX	42°	- 1.4031E+07	- 1.42668E+07	1,680
SIXX	45°	- 1.3094E+07	- 1.33861E+07	2,230
SIXX	48°	- 1.1169E+07	- 1.24518E+07	11,485
SIXX	51°	- 1.0593E+07	- 1.11524E+07	5,280

10 Summary of the results

The results are of good quality if it is considered that they are compared with an analytical solution and that the grids used are not particularly fine.

The best solutions are given by modelings E and F (algorithms Lagrangian and continuous, respectively) which use quadratic elements with quadratic projection (without using this projection, the results are false). Then modelings A and H come which, like the preceding one, use the algorithms Lagrangian and continuous, respectively, with master-slave pairing. If one uses nodal pairing (modeling B), the solution is good but it should be stressed that this technique of pairing is limited to the small slips. Finally modelings C and D come which use the algorithm of penalization and which give acceptable results. Let us note that convergence with these algorithms is much slower and difficult.

If one examines the extent of the surface of contact using the impression of the structure of data VALE_CONT (see file of results), it is noted that it is given very precisely (60°). With regard to adherent surface, the algorithms analytically return an acceptable value about 30° instead of 26.2°.